

NETVIO

SIMPLIFYING COMPLEXITY

Quick Start Guide

Thank you for purchasing this Netvio product. The quick-start-guide is designed to provide all required information to install your product successfully, ensuring correct installation standards, therefore guaranteeing performance in accordance with published features and specifications. Netvio therefore greatly appreciates your time in reviewing the provided information and following our recommended guidelines.

SP-H2-0104-10

Compact yet powerful 1x4 18Gb 4K/60 4:4:4 HDR HDMI splitter with installer benefits of 4K/1080p scaling and audio de-embed.



BOX CONTENTS

- Netvio Splitter Device
- 1x Compatible plug-in PSU

WARRANTY INFORMATION

- 2-Year standard parts & labour warranty
- FREE 3-Year warranty subject to product registration.
- 5-Year & 10-Year extended warranty options available.
- Full warranty details including coverage, registration & warranty extensions available at www.netvio.co.uk




SafeGuard
5% 5-Yrs | 10% 10-Yrs

Cost effective 5-yr (for 5%) and 10-yr (for 10%) extended warranties.


www.netvio.co.uk/safeguard

PRODUCT SUPPORT - Please contact your authorised Netvio reseller.

UK/EMEA Support | +44 (0) 870 488 7001 | US Support | +833 720 0637 | Email | support@netvio.co.uk | Live Chat | www.netvio.co.uk

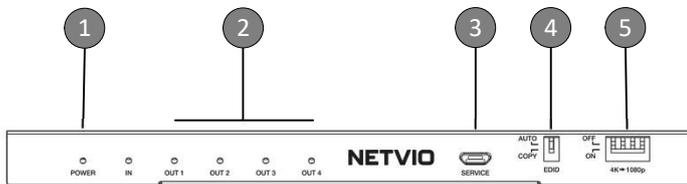

1	Power Status LED
2	HDMI Input Confirmation LED (OP1-4)
3	Firmware Update Port
4	EDID Setting Automatic Copy from Output-1
5	Scaler (per output) Pass-thru 4K to 1080p

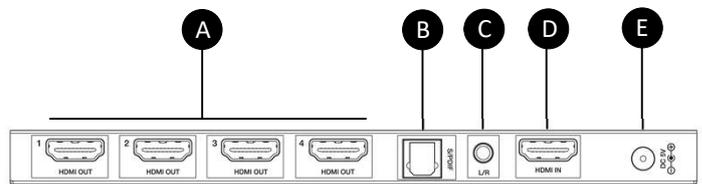



A	HDMI (Display) Outputs 1-4
B	S/PDIF Digital Audio Output
C	L/R Stereo Analog Audio Line-Level Output
D	HDMI (Source) Input
E	5V DC Power Input

SCALING





For best performance, use HIGH SPEED HDMI or Active Optical Cables rated to at least 18Gb, especially for cable lengths in excess of 10m

OP-1	OP-2	OP-3	OP-4
OFF Pass-thru	Pass-thru	Pass-thru	Pass-thru
ON 4K > 1080p	4K > 1080p	4K > 1080p	4K > 1080p



When copying EDID, connect your display device to Output-1. Recycle power every time settings are adjusted.

EDID SETTING
AUTO Best outcome from source & displays
COPY Copy EDID from (Display) Output-1
<i>Power recycle necessary when changing settings</i>



For direct connection to audio amplifier

AUDIO EXTRACTION
S/PDIF Digital Audio Output
L/R PCM2.0 Stereo Line-Out Audio Output
<i>Simultaneous Operation</i>

Basic Specifications

Encoding Data Rates	HDMI 17.82Gbp (HDMI2.0b)
Video Resolutions (Max)	3840x2160 60fps 8b 4:4:4
Max Pixel Clock	600MHz
HDR	HDR10, HDR10+, HLG, Dolby Vision
HDCP	Inclusive up to 2.2
EDID	Automatic Copy – HDMI OP 1
Audio Formats	LPCM 2ch, LPCM 5.1, LPCM 7.1, Dolby Digital, Dolby Digital Plus, Dolby TrueHD, DTS, DTS Master, Dolby Atmos, DTS:X.
Video Scaling	Pass-thru mode & 4K > 1080p per HDMI output
Storage	-20°C / +60°C 20% - 90% RH
Operating	0°C / +40°C 20% - 90% RH
Power	5V/1A DC
Weight Dimensions	227g H: 14mm W: 180mm D: 63mm
Regulations	CE UKCA FCC RoHS
Warranty	2-Yr Standard, 3-Yr with registration, 5-Yr & 10-Yr extended warranty available.



Please dispose and recycle responsibly in accordance with local laws and regulations



Attempts to remove product casings could result in electrical shock. Please do not attempt to repair the device. In the event of product service requirements, please contact Netvio Ltd or an authorised reseller for service procedures. Any unauthorised attempt to repair the product or attempts to replace components with non-approved parts will invalidate the product warranty. For full warranty conditions, please visit www.netvio.co.uk

Netvio Ltd – INFOLAB21, Lancaster University, Bailrigg Road,
Lancaster, LA1 4WA, UK

NETVIO